

ANALYSIS OF AN INTERFACE STABILISED FINITE ELEMENT METHOD: THE ADVECTION-DIFFUSION-REACTION EQUATION

GARTH N. WELLS*

Abstract. Analysis of an interface stabilised finite element method for the scalar advection-diffusion-reaction equation is presented. The method inherits attractive properties of both continuous and discontinuous Galerkin methods, namely the same number of global degrees of freedom as a continuous Galerkin method on a given mesh and the stability properties of discontinuous Galerkin methods for advection dominated problems. Simulations using the approach in other works demonstrated good stability properties with minimal numerical dissipation, and standard convergence rates for the lowest order elements were observed. In this work, stability of the formulation, in the form of an inf-sup condition for the hyperbolic limit and coercivity for the elliptic case, is proved, as is order $k + 1/2$ order convergence for the advection-dominated case and order $k + 1$ convergence for the diffusive limit in the L^2 norm. The analysis results are supported by a number of numerical experiments.

Key words. Finite element methods, discontinuous Galerkin methods, advection-diffusion-reaction

AMS subject classifications. 65N12, 65N30

1. Introduction. Discontinuous Galerkin methods have proven effective and popular for classes of partial differential equations, in particular transport equations in which advection is dominant. The attractive stability properties of particular discontinuous Galerkin methods and the ability to match non-conforming meshes are advantageous, but do come at the cost of an increased number of global degrees of freedom on a given mesh compared to continuous Galerkin methods. In a number of recent works, advances have been made in reconciling the appealing features of continuous and discontinuous Galerkin methods in one framework. Works in this direction include those of Hughes et al. [1], Labeur and Wells [2] and Cockburn et al. [3] for the advection-diffusion equation, Burman and Stamm [4] for advection-reaction equation, and Labeur and Wells [2] and Labeur and Wells [5] for the incompressible Navier-Stokes equations. The methods generally strive for a reduction in the number of global degrees of freedom relative to a conventional discontinuous Galerkin method without sacrificing other desirable features. In this work, stability and convergence estimates are presented for one such method applied to the scalar advection-diffusion-reaction equation, namely the interface stabilised method as formulated in Labeur and Wells [2].

The principle behind the interface stabilised method is simple: the equation of interest is posed cell-wise subject to weakly imposed Dirichlet boundary conditions in the spirit of discontinuous Galerkin methods. The boundary condition which is weakly satisfied is provided by an ‘interface’ function that lives only on cell facets and is single-valued on cell facets. An equation for this additional field is furnished by insisting upon weak continuity of the so-called ‘numerical flux’ across cell facets. This weak continuity of the numerical flux is in contrast with typical discontinuous Galerkin methods which satisfy continuity of the numerical flux across cell facets point-wise by construction. For particular choices in the method, it may be possible to achieve point-wise continuity. Upwinding of the advective flux at interfaces can

*Department of Engineering, University of Cambridge, Trumpington Street, Cambridge CB2 1PZ, United Kingdom (gnw20@cam.ac.uk).

be incorporated naturally in the definition of the numerical flux, as is typical for discontinuous Galerkin methods. By building a degree of continuity into the interface function spaces (at cell vertices in two dimensions and across cell edges in three dimensions), the number of global degrees of freedom is equal to that for a continuous Galerkin method on the same mesh. The key to this reduction in the number of global degrees of freedom is that functions which are defined on cells are not linked directly across cell facets, rather they communicate only via the interface function. Therefore, functions on cells can be eliminated locally (cell-wise) in favour of the functions which live on cell facets. Outwardly the approach appears to have elements in common with mortar methods, and could serve to elucidate links between mortar and discontinuous Galerkin methods.

The motivation for analysing the interface stabilised method comes from the observed performance of the method for the advection-diffusion in Hughes et al. [1] and Labeur and Wells [2] and for the incompressible Navier-Stokes equations in Labeur and Wells [2], and for the Navier-Stokes equations on moving domains, as presented in Labeur and Wells [5]. The method was observed in simulations to be robust and only minimal numerical dissipation could be detected. Furthermore, in common with discontinuous Galerkin methods and in contrast with most stabilised continuous finite element methods, the approach does not involve any flow-dependent parameters. Labeur and Wells [2] also showed that the methodology can lead to a stable formulation for Stokes equation using equal-order Lagrange basis functions for the velocity and the pressure, although the analysis in this work is confined to the advection-diffusion-reaction equation. The method examined in this work is closely related to that formulated by Hughes et al. [1] for the advection-diffusion equation, and analysed in Buffa et al. [6]. Buffa et al. [6] proved stability for a streamline-diffusion stabilised variant of the method, but not for the original formulation. For the case without streamline diffusion stability was demonstrated for some examples by evaluating the inf-sup condition numerically, however in the absence of an analytical stability estimate convergence estimates could not be formulated. The stability and error estimates for a method without streamline diffusion developed here are made possible by: (1) the different and transparent format in which the problem is posed; and (2) the different machinery that is brought to bear on the problem. With respect to the last point, advantage is taken of some developments formulated by Ern and Guermond [7].

In the remainder of this work, the equation of interest and the numerical method to be analysed are first formalised. This is followed by analysis of the hyperbolic case, for which satisfaction of an inf-sup is demonstrated. The the diffusive limit case is then considered, for which demonstration of coercivity suffices. The results of some numerical simulations are then presented in support of the analysis, after which conclusions are drawn.

2. Interface stabilised method.

2.1. Model problem. Consider a polygonal domain $\Omega \subset \mathbb{R}^d$, where $1 \leq d \leq 3$, with boundary $\Gamma = \partial\Omega$. The unit outward normal vector to the domain is denoted by \mathbf{n} . The advection-diffusion-reaction equation reads:

$$\mu u + \mathbf{a} \cdot \nabla u - \kappa \nabla^2 u = f \quad \text{in } \Omega, \quad (2.1)$$

where $\mu \geq 0$ and $\kappa \geq 0$ are assumed to be constant, $\mathbf{a} : \Omega \rightarrow \mathbb{R}^d$ is a divergence-free vector field which is Lipschitz continuous and $f : \Omega \rightarrow \mathbb{R}$ is a suitably smooth source

term. The divergence-free condition on \mathbf{a} can easily be relaxed to $\mu + \nabla \cdot \mathbf{a} > 0$. Portions of the boundary on which $\mathbf{a} \cdot \mathbf{n} \geq 0$ are denoted by Γ_+ , and portions on which $\mathbf{a} \cdot \mathbf{n} < 0$ are denoted by Γ_- . A function γ is defined on boundaries such that $\gamma = 0$ on outflow portions of the boundary (Γ_+) and $\gamma = 1$ on inflow portions of the boundary (Γ_-).

For the case $\kappa > 0$, the boundary is partitioned into Γ_N and Γ_D such that $\overline{\Gamma_N \cup \Gamma_D} = \Gamma$ and $\Gamma_N \cap \Gamma_D = \emptyset$, and the boundary conditions

$$\begin{aligned} (-\gamma u \mathbf{a} + \kappa \nabla u) \cdot \mathbf{n} &= g & \text{on } \Gamma_N, \\ u &= 0 & \text{on } \Gamma_D, \end{aligned} \quad (2.2)$$

are considered, where $g : \Gamma_N \rightarrow \mathbb{R}$ is a suitably smooth prescribed function. For the case $\kappa = 0$, then $\Gamma_D = \emptyset$, $\Gamma_N = \Gamma_-$ and the considered boundary condition reads:

$$-u \mathbf{a} \cdot \mathbf{n} = g \quad \text{on } \Gamma_-. \quad (2.3)$$

2.2. The method. Let \mathcal{T} be a triangulation of Ω into non-overlapping simplices such that $\mathcal{T} = \{K\}$. A simplex $K \in \mathcal{T}$ will be referred to as a cell and a measure of the size of a cell K will be denoted by h_K , with the usual assumption that $h_K \leq 1$. The boundary of a cell K is denoted by ∂K and the outward unit normal to a cell is denoted by \mathbf{n} . The outflow portion of a cell boundary is the portion on which $\mathbf{a} \cdot \mathbf{n} \geq 0$, and is denoted by ∂K_+ . The inflow portion of a cell boundary is the portion on which $\mathbf{a} \cdot \mathbf{n} < 0$, and is denoted by ∂K_- . As for the exterior boundary, the function γ is defined such that $\gamma = 0$ on ∂K_+ and $\gamma = 1$ on ∂K_- . The set of all facets $\mathcal{F} = \{F\}$ contained in the mesh will be used, as will the union of all facets, which is denoted by Γ^0 . Adjacent cells are considered to share a common facet F .

The bilinear and linear forms for the advection-diffusion-reaction equation are now introduced. Using the notation $\mathbf{w} = (w, \bar{w})$ and $\mathbf{v} = (v, \bar{v})$, consider the bilinear form:

$$\begin{aligned} B(\mathbf{w}, \mathbf{v}) &= \int_{\Omega} \mu w v \, dx + \int_{\Omega} (-\mathbf{a} w + \kappa \nabla w) \cdot \nabla v \, dx \\ &+ \sum_K \int_{\partial K} \left(-\mathbf{a} w + \kappa \nabla w - \left(\gamma \mathbf{a} - \frac{\alpha \kappa}{h_K} \mathbf{n} \right) (\bar{w} - w) \right) \cdot \mathbf{n} (\bar{v} - v) \, ds \\ &+ \sum_K \int_{\partial K} \kappa (\bar{w} - w) \nabla v \cdot \mathbf{n} \, ds + \int_{\Gamma_+} \mathbf{a} \cdot \mathbf{n} \bar{v} \bar{w} \, ds \end{aligned} \quad (2.4)$$

and the linear form

$$L(\mathbf{v}) = \int_{\Omega} f v \, dx + \int_{\Gamma_N} g \bar{v} \, ds, \quad (2.5)$$

where $\alpha \geq 0$. The relevant finite element function spaces for the problem which will be considered read

$$W_h = \{w_h \in L^2(\Omega), w_h|_K \in P_k(K) \forall K \in \mathcal{T}\}, \quad (2.6)$$

$$\bar{W}_h = \{\bar{w}_h \in H^l(\Gamma^0), \bar{w}_h|_F \in P_k(F) \forall F \in \mathcal{F}, \bar{w}_h = 0 \text{ on } \Gamma_D\}, \quad (2.7)$$

where $0 \leq l \leq 1$. The space W_h is the usual space commonly associated with discontinuous Galerkin methods, and the space \bar{W}_h contains Lagrange polynomial shape

functions that ‘live’ only on cell facets and are single-valued on facets. The choice of l , which determines the regularity of the facet functions at cell vertices in two dimensions and across cell edges in three dimensions, will have a significant impact on the structure of the resulting matrix problem. Using the notation $W_h^* = W_h \times \bar{W}_h$ and $\mathbf{v}_h \in W_h^*$, which is equivalent to $(v_h, \bar{v}_h) \in W_h^*$, the finite element problem of interest reads: find $\mathbf{u}_h \in W_h^*$ such that

$$B(\mathbf{u}_h, \mathbf{v}_h) = L(\mathbf{v}_h) \quad \forall \mathbf{v}_h \in W_h^*. \quad (2.8)$$

Noteworthy in the bilinear form is that the functions w_h , which are discontinuous across cell facets, are not linked directly across facets. They are only linked implicitly through their interaction with \bar{w}_h . Setting $\mathbf{v}_h = (v_h, 0)$ leads to a local (cell-wise) problem, which, given \bar{u}_h and f can be solved locally to eliminate u_h in favour of \bar{u}_h . This process is commonly referred to as static condensation. Then, setting $\mathbf{v}_h = (0, \bar{v}_h)$, one can solve a global problem to yield the interface solution \bar{u}_h . The field u_h can then be recovered trivially element-wise. The condensation process is further elaborated below.

A numerical flux $\bar{\sigma}$ on cell boundaries which is not single-valued on cell facets can be identified in the problem, and reads

$$\bar{\sigma}(\mathbf{w}) = -\mathbf{a}w + \kappa \nabla w - \left(\gamma \mathbf{a} - \frac{\alpha \kappa}{h_K} \mathbf{n} \right) (\bar{w} - w). \quad (2.9)$$

The numerical flux can be evaluated on both sides of a facet. On the outflow (upwind) portion of a cell boundary, the advective part of the numerical flux is equal to the regular advective flux. On the inflow (downwind) portion of a cell boundary, the advective part of the numerical flux depends on the interface function, taking on $-\mathbf{a}\bar{u}$. The diffusive numerical flux on a cell boundary has contributions from the regular flux and a penalty-like contribution which depends on the difference between w_h and the interface function \bar{w}_h . Expressing the method in terms of the numerical flux, setting $\mathbf{v}_h = (v_h, 0)$ leads to the following local problem on each cell: given \bar{u}_h , find $u_h \in W_h$ such that for all $v_h \in W_h$

$$\begin{aligned} \int_K \mu u_h v_h dx + \int_K (-\mathbf{a}u_h + \kappa \nabla u_h) \cdot \nabla v_h dx - \int_{\partial K} \bar{\sigma}(\mathbf{u}_h) \cdot \mathbf{n} v_h ds \\ + \int_{\partial K} \kappa (\bar{u}_h - u_h) \nabla v_h \cdot \mathbf{n} ds = \int_K f v_h dx. \end{aligned} \quad (2.10)$$

The treatment of the diffusive terms resembles that in [8] for the Poisson equation. Equation (2.10) elucidates the role of the local equation which is to find an approximate solution to the problem at hand on each cell subject to weakly imposed boundary conditions provided by \bar{u}_h . Setting $\mathbf{v}_h = (0, \bar{v}_h)$ furnishes the global problem: given u_h , find $\bar{u}_h \in \bar{W}_h$ such that for all $\bar{v}_h \in \bar{W}_h$

$$\sum_K \int_{\partial K} \bar{\sigma}(\mathbf{u}_h) \cdot \mathbf{n} \bar{v}_h ds + \int_{\Gamma_+} \mathbf{a} \cdot \mathbf{n} \bar{u}_h \bar{v}_h ds = \int_{\Gamma_N} g \bar{v}_h ds, \quad (2.11)$$

It is evident that the global equation imposes weak continuity of the numerical flux across cell facets.

To formulate a global problem with the same number of degrees as a continuous finite element method, l in equation (2.7) must be chosen such that there is only

one degree of freedom at a given point; the interface functions are continuous at cell vertices in two dimensions and along cell edges in three dimensions. Further details on the formulation of the interface stabilised method and various algorithmic details can be found in Labeur and Wells [2].

The work of Hughes et al. [1] can be manipulated into the same framework, although both the advective and diffusive parts of the flux are upwinded, whereas in Labeur and Wells [2] the advective flux is upwinded and a centred approach to the diffusive flux is adopted. The method presented in Cockburn et al. [3] follows the same framework as Labeur and Wells [2], although the use of functions lying in $L^2(\Gamma^0)$ on facets is advocated.

2.3. Limit cases. The method will be analysed for the hyperbolic ($\kappa = 0$) and elliptic ($\mathbf{a} = \mathbf{0}, \mu = 0$) limit cases. The bilinear form is therefore decomposed into advective and diffusive parts,

$$B(\mathbf{w}, \mathbf{v}) = B_A(\mathbf{w}, \mathbf{v}) + B_D(\mathbf{w}, \mathbf{v}), \quad (2.12)$$

where

$$\begin{aligned} B_A(\mathbf{w}, \mathbf{v}) = & \int_{\Omega} \mu w v \, dx - \sum_K \int_K \mathbf{a} w \cdot \nabla v \, dx - \sum_K \int_{\partial K_+} \mathbf{a} \cdot \mathbf{n} w (\bar{v} - v) \, ds \\ & - \sum_K \int_{\partial K_-} \mathbf{a} \cdot \mathbf{n} \bar{w} (\bar{v} - v) \, ds + \int_{\Gamma_+} \mathbf{a} \cdot \mathbf{n} \bar{w} \bar{v} \, ds \end{aligned} \quad (2.13)$$

and

$$\begin{aligned} B_D(\mathbf{w}, \mathbf{v}) = & \sum_K \int_K \kappa \nabla w \cdot \nabla v \, dx \\ & + \sum_K \int_{\partial K} \left(\kappa \nabla w + \frac{\alpha \kappa}{h_K} \mathbf{n} (\bar{w} - w) \right) \cdot \mathbf{n} (\bar{v} - v) \, ds \\ & + \sum_K \int_{\partial K} \kappa (\bar{w} - w) \nabla v \cdot \mathbf{n} \, ds. \end{aligned} \quad (2.14)$$

Stability and error estimates will be proved by analysing $B_A(\mathbf{w}, \mathbf{v})$ and $B_D(\mathbf{w}, \mathbf{v})$ independently.

2.4. Conventional discontinuous Galerkin methods as a special case. If the functions defined on facets are defined to be in $L^2(\Gamma^0)$ ($l = 0$ in equation (2.7)), then for the hyperbolic case the formulation reduces to the conventional discontinuous Galerkin formulation with full upwinding of the advective flux [9, 10, 11]. In the diffusive limit, it reduces to a method which closely resembles the symmetric interior penalty method [12, 13]. Of prime practical interest is the case where the interface functions are continuous as this leads to the fewest number of global degrees of freedom, but the special case of $l = 0$ is considered briefly in this section to illustrate a link with conventional discontinuous Galerkin methods.

For the case $\mu = \kappa = 0$, setting $v_h = 0$ everywhere and $\bar{v}_h = 0$ everywhere with the exception of one interior facet F on which $\bar{v}_h = 1$, the method implies that at the facet F

$$-\mathbf{a} \bar{w}_h \cdot \mathbf{n}_+ = -\mathbf{a} w_{h+} \cdot \mathbf{n}_+, \quad (2.15)$$

where the subscript '+' indicates functions evaluated on the boundary of the upwind cell. This implies that for a given w_h , the facet function \bar{w}_h simply takes on the upwind value on each facet. Inserting this into equation (2.13) and setting $\bar{v}_h = 0$,

$$B_A(w_h, v_h) = \int_{\Omega} \mu w_h v_h dx - \sum_K \int_K \mathbf{a} w_h \cdot \nabla v_h dx + \sum_K \int_{\partial K_+} \mathbf{a} \cdot \mathbf{n} w_h v_h ds + \sum_K \int_{\partial K_-} \mathbf{a} \cdot \mathbf{n} w_{h+} v_h ds, \quad (2.16)$$

which is the bilinear form associated with the classical discontinuous Galerkin formulation for hyperbolic problems with full upwinding.

The diffusive case ($\kappa = 1$, $\mu = 0$, $\mathbf{a} = 0$, $\alpha > 0$) is now considered, in which case the subscripts '+' and '-' indicate functions evaluated on opposite sides of a facet. Following the same process as for the hyperbolic case leads to

$$\frac{\alpha}{h_K} \bar{w}_h = -\frac{1}{2} (\nabla w_{h+} \cdot \mathbf{n}_+ + \nabla w_{h-} \cdot \mathbf{n}_-) + \frac{1}{2} \frac{\alpha}{h_K} (w_{h+} + w_{h-}) \quad (2.17)$$

on facets. Assuming for simplicity that h_K is constant, inserting the expression for \bar{w}_h into (2.14) and after some tedious manipulations, the bilinear form reduces to:

$$B_D(w_h, v_h) = \sum_K \int_K \nabla w_h \cdot \nabla v_h dx - \int_{\Gamma^0} \langle \nabla w_h \rangle \cdot \llbracket v_h \rrbracket ds - \int_{\Gamma^0} \llbracket w_h \rrbracket \cdot \langle \nabla v_h \rangle ds + \frac{\alpha}{2h_K} \int_{\Gamma^0} \llbracket w_h \rrbracket \cdot \llbracket v_h \rrbracket ds - \frac{h_K}{2\alpha} \int_{\Gamma^0} \llbracket \nabla w_h \rrbracket \llbracket \nabla v_h \rrbracket ds, \quad (2.18)$$

where $\langle a \rangle = 1/2(a_+ + a_-)$ and $\llbracket a \rrbracket = (a_+ \mathbf{n}_+ + a_- \mathbf{n}_-)$ are the usual average and jump definitions, respectively. This bilinear form resembles closely that of the conventional symmetric interior penalty method, with the exception of the term which penalises jumps in the gradient of the solution.

3. Notation and useful inequalities. The standard norm on the Sobolev space $H^s(K)$ will be denoted by $\|\cdot\|_{s,K}$. Constants c which are independent of h_K will be used extensively in the presentation. The values of the constants may change at each appearance. Use will be made of various estimates for functions on finite element cells $v_h \in H^1(K)$ for the case $h_K \leq 1$. In particular, use will be made of the trace inequality:

$$\|v\|_{0,\partial K}^2 \leq c \|v\|_{0,K} \|v\|_{1,K}, \quad (3.1)$$

the inverse estimate

$$\|\nabla v\|_{0,K} \leq ch_K^{-1} \|v\|_{0,K}, \quad (3.2)$$

and an estimate which is derived from the combination of the above two,

$$\|v\|_{0,\partial K} \leq ch_K^{-\frac{1}{2}} \|v\|_{0,K}. \quad (3.3)$$

See, for example, Brenner and Scott [14] or Ern and Guermond [15] for background on these estimates.

Frequently, functions defined on Ω or on a finite element cell K will be restricted to an interior or exterior boundary. For finite element functions defined on a cell,

owing to the continuity of the functions on a cell the trace is well-defined point-wise on the boundary of a cell. When considering functions in $H^1(\Omega)$ restricted to Γ^0 , the action of a trace operator $\gamma : H^1(\Omega) \rightarrow H^{1/2}(\Gamma^0)$ should be taken as implied in the presentation.

4. Analysis for the hyperbolic limit. The interface stabilised method is first analysed for the hyperbolic limit case which corresponds to the bilinear form in equation (2.13). For this case the spaces

$$W(h) = W_h + H^1(\Omega), \quad (4.1)$$

$$\bar{W}(h) = \bar{W}_h + H^{1/2}(\Gamma^0), \quad (4.2)$$

will be used in the analysis, as will the notation $W^*(h) = W(h) \times \bar{W}(h)$. The space $\bar{W}(h)$ has been defined such that it contains the trace on Γ^0 of all functions in $H^1(\Omega)$. This will prove important in developing error estimates.

Introducing the notation $a_n = |\mathbf{a} \cdot \mathbf{n}|$, two norms are introduced on $W^*(h)$. The first is what will be referred to as the ‘stability’ norm,

$$\begin{aligned} \|\mathbf{v}\|_A^2 &= \|v\|_{0,\Omega}^2 + \sum_K h_K \|\mathbf{a} \cdot \nabla v\|_{0,K}^2 \\ &\quad + \sum_K \left\| a_n^{\frac{1}{2}} (\bar{v} - v) \right\|_{0,\partial K}^2 + \sum_K h_K \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\partial K_-}^2 + \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\Gamma}^2. \end{aligned} \quad (4.3)$$

The second norm, which will be referred to as the ‘continuity’ norm, reads

$$\|\mathbf{v}\|_{A'}^2 = \|\mathbf{v}\|_A^2 + \sum_K h_K^{-1} \|v\|_{0,K}^2 + \sum_K \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\partial K_-}^2. \quad (4.4)$$

4.1. Stability. Stability of the interface stabilised method for hyperbolic problems will be demonstrated through satisfaction of the inf-sup condition. Before presenting the inf-sup result, a number of intermediate results are presented. The analysis for the hyperbolic case borrows from the approach of Ern and Guermond [7] to discontinuous Galerkin methods (see also Ern and Guermond [15], Section 5.6). A similar approach is adopted by Burman and Stamm [4].

LEMMA 4.1 (coercivity). *There exists a constant $c > 0$ such that for all $\mathbf{v} \in W^*(h)$*

$$B_A(\mathbf{v}, \mathbf{v}) \geq c \left(\|v\|_{0,\Omega}^2 + \sum_K \left\| a_n^{\frac{1}{2}} (\bar{v} - v) \right\|_{0,\partial K}^2 + \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\Gamma}^2 + \sum_K h_K \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\partial K_-}^2 \right). \quad (4.5)$$

Proof. From the definition of $B_A(\mathbf{v}, \mathbf{v})$ and the fact that \mathbf{a} is solenoidal, it follows from some straightforward manipulations that

$$B_A(\mathbf{v}, \mathbf{v}) = \mu \|v\|_{0,\Omega}^2 + \frac{1}{2} \sum_K \left\| a_n^{\frac{1}{2}} (\bar{v} - v) \right\|_{0,\partial K}^2 + \frac{1}{2} \left\| a_n^{\frac{1}{2}} \bar{v} \right\|_{0,\Gamma}^2. \quad (4.6)$$

The task now is to show that $h_K \|\bar{v}\|_{0,\partial K}$ can be bounded in terms of $\|\bar{v} - v\|_{0,\partial K}$, that is that there exists a constant $c > 0$ such that

$$h_K \|\bar{v}\|_{0,\partial K}^2 \leq c \left(\|v\|_{0,K}^2 + \|\bar{v} - v\|_{0,\partial K}^2 \right), \quad (4.7)$$

for all $K \in \mathcal{T}$. This follows from considering that

$$\begin{aligned}
h_K \|\bar{v}\|_{0,\partial K}^2 &= h_K \|\bar{v} - v + v\|_{0,\partial K}^2 \\
&\leq h_K \left(\|\bar{v} - v\|_{0,\partial K} + \|v\|_{0,\partial K} \right)^2 \\
&\leq 2h_K \left(\|\bar{v} - v\|_{0,\partial K}^2 + \|v\|_{0,\partial K}^2 \right), \\
&\leq 2h_K \left(\|\bar{v} - v\|_{0,\partial K}^2 + ch_K^{-1} \|v\|_{0,K}^2 \right) \\
&\leq c \left(\|\bar{v} - v\|_{0,\partial K}^2 + \|v\|_{0,K}^2 \right).
\end{aligned} \tag{4.8}$$

Coercivity follows from equation (4.6) and the inequality (4.7). \square

As is usual for advection-reaction problems, $B_A(\mathbf{v}, \mathbf{v})$ is coercive with respect to a particular norm, but the norm offers no control over derivatives of the solution.

Consider a function \mathbf{z}_h which depends on $\mathbf{w}_h \in W_h^*$ according to

$$\mathbf{z}_h = (z_h, \bar{z}_h) = (-h_K \bar{\mathbf{a}}_K \cdot \nabla w_h, h_* \bar{w}_h), \tag{4.9}$$

where $\bar{\mathbf{a}}_K$ is the average of \mathbf{a} on cell K and where $h_* = \min_{K \in \mathcal{T}} h_K$. The term h_* is used in place of h_K to ensure that $\bar{z}_h \in \bar{W}_h$ for all permissible choices of l in equation (2.7). Lipschitz continuity of \mathbf{a} and a standard inverse estimate implies the following bound on a cell K [4]:

$$\|\mathbf{a} - \bar{\mathbf{a}}_K\|_{L^\infty(K)} \leq ch_K \|\mathbf{a}\|_{W_\infty^1(K)}. \tag{4.10}$$

LEMMA 4.2. *If the function \mathbf{z}_h depends on \mathbf{w}_h according to equation (4.9), then for all $\mathbf{w}_h \in W_h^*$ there exists a constant $c > 0$ such that if $\mathbf{v}_h = c\mathbf{w}_h + \mathbf{z}_h$, then*

$$\|\mathbf{w}_h\|_A^2 \leq B_A(\mathbf{z}_h, \mathbf{w}_h) + cB_A(\mathbf{w}_h, \mathbf{w}_h) = B_A(\mathbf{v}_h, \mathbf{w}_h). \tag{4.11}$$

Proof. Consider first two bounds on $\|z_h\|_K$. Using equation (4.10) and the inverse estimate (3.2),

$$\begin{aligned}
\|z_h\|_{0,K} &= \|h_K \bar{\mathbf{a}}_K \cdot \nabla w_h\|_{0,K} \\
&\leq \|h_K \mathbf{a} \cdot \nabla w_h\|_{0,K} + \|h_K (\mathbf{a} - \bar{\mathbf{a}}_K) \cdot \nabla w_h\|_{0,K} \\
&\leq \|h_K \mathbf{a} \cdot \nabla w_h\|_{0,K} + c \|h_K^2 \nabla w_h\|_{0,K} \\
&\leq \|h_K \mathbf{a} \cdot \nabla w_h\|_{0,K} + c \|h_K w_h\|_{0,K},
\end{aligned} \tag{4.12}$$

and from the inverse estimate (3.2)

$$\|z_h\|_{0,K} = \|h_K \bar{\mathbf{a}}_K \cdot \nabla w_h\|_{0,K} \leq c \|w_h\|_{0,K}. \tag{4.13}$$

From the definition of the bilinear form in equation (2.13),

$$\begin{aligned}
\sum_K h_K \|\mathbf{a} \cdot \nabla w_h\|_{0,K}^2 &= B_A(\mathbf{z}_h, \mathbf{w}_h) + \sum_K h_K \int_K \mu \bar{\mathbf{a}} \cdot (\nabla w_h) w_h \, dx \\
&+ \sum_K h_K \int_K (\mathbf{a} \cdot \nabla w_h) (\mathbf{a} - \bar{\mathbf{a}}) \cdot \nabla w_h \, dx - \sum_K h_K \int_{\partial K_+} a_n (\bar{w}_h - w_h) \bar{\mathbf{a}} \cdot \nabla w_h \, ds \\
&\quad - h_* \sum_K \int_{\partial K_-} a_n \bar{w}_h (\bar{w}_h - w_h) \, ds - h_* \int_{\Gamma_+} a_n \bar{w}_h^2 \, ds.
\end{aligned} \tag{4.14}$$

Applying the Cauchy-Schwarz inequality to the various terms on the right-hand side,

$$\begin{aligned}
\sum_K h_K \|\mathbf{a} \cdot \nabla w_h\|_{0,K}^2 &\leq B_A(\mathbf{z}_h, \mathbf{w}_h) + \sum_K \|\mu w_h\|_{0,K} \|h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,K} \\
&\quad + \sum_K \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K} \|\mathbf{a} - \bar{\mathbf{a}}\|_{L^\infty(K)} \left\| h_K^{\frac{1}{2}} \nabla w_h \right\|_{0,K} \\
&\quad + \sum_K \|h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,\partial K_+} \|a_n(\bar{w}_h - w_h)\|_{0,\partial K_+} \\
&\quad + \sum_K \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} \bar{w}_h \right\|_{0,\partial K_-} \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} (\bar{w}_h - w_h) \right\|_{0,\partial K_-} + \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} \bar{w}_h \right\|_{0,\Gamma_+}^2. \quad (4.15)
\end{aligned}$$

Each term is now appropriately bounded. Using equation (4.13),

$$\sum_K \|\mu w_h\|_{0,K} \|h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,K} \leq c \sum_K \|w_h\|_{0,K}^2. \quad (4.16)$$

Setting $R_2 = \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K} \|\mathbf{a} - \bar{\mathbf{a}}\|_{L^\infty(K)} \left\| h_K^{\frac{1}{2}} \nabla w_h \right\|_{0,K}$ and using (4.10), an inverse inequality and Young's inequality,

$$\begin{aligned}
R_2 &\leq c \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K} \left\| h_K^{3/2} \nabla w_h \right\|_{0,K} \\
&\leq c \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K} \left\| h_K^{\frac{1}{2}} w_h \right\|_{0,K} \\
&\leq c_{\gamma_1} \left\| h_K^{\frac{1}{2}} w_h \right\|_{0,K}^2 + \gamma_1 \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K}^2, \quad (4.17)
\end{aligned}$$

where $\gamma_1 > 0$ but is otherwise arbitrary and c_{γ_1} has a dependency on γ_1 . Setting $R_3 = \|h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,\partial K_+} \|a_n(\bar{w}_h - w_h)\|_{0,\partial K_+}$ and equation (4.12) and Young's inequality,

$$\begin{aligned}
R_3 &\leq c h_K^{-\frac{1}{2}} \|h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,K} \|a_n(\bar{w}_h - w_h)\|_{0,\partial K_+} \\
&\leq c \left(\left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K} + \left\| h_K^{\frac{1}{2}} w_h \right\|_{0,K} \right) \|a_n(\bar{w}_h - w_h)\|_{0,\partial K_+} \\
&\leq c_{\gamma_2} \left(\|a_n(\bar{w}_h - w_h)\|_{0,\partial K_+}^2 + h_K \|w_h\|_{0,K}^2 \right) + \gamma_2 \left\| h_K^{\frac{1}{2}} \mathbf{a} \cdot \nabla w_h \right\|_{0,K}^2, \quad (4.18)
\end{aligned}$$

where $\gamma_2 > 0$ but is otherwise arbitrary and c_{γ_2} has a dependency on γ_2 . Setting $R_4 = \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} \bar{v}_h \right\|_{0,\partial K_-} \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} (\bar{w}_h - w_h) \right\|_{0,\partial K_-}$,

$$\begin{aligned}
R_4 &\leq c_{\gamma_3} \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} (\bar{w}_h - w_h) \right\|_{0,\partial K_-}^2 + \gamma_3 \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} \bar{v}_h \right\|_{0,\partial K_-}^2 \\
&\leq c_{\gamma_3} \left\| a_n^{\frac{1}{2}} (\bar{v}_h - w_h) \right\|_{0,\partial K_-}^2 + \gamma_3 \left\| h_\star^{\frac{1}{2}} a_n^{\frac{1}{2}} \bar{v}_h \right\|_{0,\partial K_-}^2, \quad (4.19)
\end{aligned}$$

where $\gamma_3 > 0$ but is otherwise arbitrary and c_{γ_3} has a dependency on γ_3 . Combining

these results and setting $\gamma_1 = \gamma_2 = 1/4$ leads to

$$\begin{aligned} & \frac{1}{2} \sum_K h_K \|\mathbf{a} \cdot \nabla w_h\|_{0,K}^2 \leq B_A(\mathbf{z}_h, \mathbf{w}_h) \\ & + c \left(\|w_h\|_{0,\Omega}^2 + \sum_K \left\| a_n^{\frac{1}{2}} (\bar{w}_h - w_h) \right\|_{0,\partial K}^2 + \sum_K h_K \left\| a_n^{\frac{1}{2}} \bar{w}_h \right\|_{0,\partial K_-}^2 + \left\| a_n^{\frac{1}{2}} \bar{w}_h \right\|_{0,\Gamma_+}^2 \right). \end{aligned} \quad (4.20)$$

From the above result, the definition of the norm in (4.3) and coercivity (4.5), the lemma follows straightforwardly. \square

PROPOSITION 4.3. *For \mathbf{z}_h which depends on \mathbf{w}_h according to equation (4.9), there exists a constant $c > 0$ such that for all $\mathbf{w}_h \in W_h^*$*

$$\|\mathbf{z}_h\|_A \leq c \|\mathbf{w}_h\|_A. \quad (4.21)$$

Proof. The components of $\|\mathbf{z}_h\|_A$ can be bounded term-by-term. Using equation (4.13),

$$\|z_h\|_{0,K}^2 = h_K^2 \|\bar{\mathbf{a}} \cdot \nabla w_h\|_{0,K}^2 \leq c \|w_h\|_{0,K}^2. \quad (4.22)$$

Using the inverse inequality (3.2) and equation (4.12),

$$\begin{aligned} h_K \|\mathbf{a} \cdot \nabla z_h\|_{0,K}^2 & \leq c h_K^{-1} \|z_h\|_{0,K}^2 \\ & \leq c h_K \left(\|\mathbf{a} \cdot \nabla w_h\|_{0,K}^2 + \|w_h\|_{0,K}^2 \right). \end{aligned} \quad (4.23)$$

For the first of the facet terms,

$$\begin{aligned} \|h_* \bar{w}_h + h_K \bar{\mathbf{a}} \cdot \nabla w_h\|_{0,\partial K}^2 & \leq c h_K \left(h_K \|\bar{w}_h\|_{0,\partial K}^2 + \|\bar{\mathbf{a}} \cdot \nabla w_h\|_{0,K}^2 \right) \\ & \leq c h_K \left(h_K \|\bar{w}_h\|_{0,\partial K}^2 + \|\mathbf{a} \cdot \nabla w_h\|_{0,K}^2 + \|w_h\|_{0,K}^2 \right). \end{aligned} \quad (4.24)$$

For the remaining facet terms, the bounds exploit $h_* \leq h_K < 1$,

$$h_K \|\bar{z}_h\|_{0,\partial K_-}^2 = h_K \|h_* \bar{w}_h\|_{0,\partial K_-}^2 \leq h_K \|\bar{w}_h\|_{0,\partial K_-}^2 \quad (4.25)$$

and

$$\|\bar{z}\|_{0,\Gamma}^2 = \|h_* \bar{w}_h\|_{0,\Gamma}^2 \leq \|\bar{w}_h\|_{0,\Gamma}^2, \quad (4.26)$$

which proves that $\|\mathbf{z}_h\|_A \leq c \|\mathbf{w}_h\|_A$. \square

Setting $\mathbf{v}_h = c\mathbf{w}_h + \mathbf{z}_h$, the preceding proposition also implies that

$$\|\mathbf{v}_h\|_A = \|c\mathbf{w}_h + \mathbf{z}_h\|_A \leq c_1 \|\mathbf{w}_h\|_A. \quad (4.27)$$

Now, using the preceding two results, the demonstration of inf-sup stability is straightforward.

LEMMA 4.4 (inf-sup stability). *There exists a constant $c > 0$ such that for all $\mathbf{v}_h \in W_h^*$*

$$\sup_{\mathbf{w}_h \in W_h^*} \frac{B_A(\mathbf{v}_h, \mathbf{w}_h)}{\|\mathbf{w}_h\|_A} \geq c \|\mathbf{v}_h\|_A. \quad (4.28)$$

Proof. Combining Lemma 4.2 and Proposition 4.3 (see also equation (4.27)) yields

$$\|\mathbf{v}_h\|_A \|\mathbf{w}_h\|_A \leq c \|\mathbf{w}_h\|_A^2 \leq c B_A(\mathbf{v}_h, \mathbf{w}_h), \quad (4.29)$$

which implies there exists a constant $c > 0$ and that there exists a function $\mathbf{w}_h \in W_h^*$ such that

$$c \|\mathbf{v}_h\| \leq \frac{B_A(\mathbf{v}_h, \mathbf{w}_h)}{\|\mathbf{w}_h\|} \quad \forall \mathbf{v}_h \in W_h^*. \quad (4.30)$$

This is satisfaction of the inf-sup condition. \square

4.2. Error analysis. To reach an error estimate, continuity of the bilinear form with respect to the norms defined in equations (4.3) and (4.4) is required. It is the continuity requirement which necessitates the introduction of the norm $\|\cdot\|_{A'}$ in addition to the stability norm $\|\cdot\|_A$.

LEMMA 4.5 (continuity). *There exists a constant $c > 0$ such that for all $\mathbf{w} \in W^*(h)$ and for all $\mathbf{v}_h \in W_h^*$*

$$|B_A(\mathbf{w}, \mathbf{v}_h)| \leq c \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A. \quad (4.31)$$

Proof. From the definition of the bilinear form:

$$\begin{aligned} B_A(\mathbf{w}, \mathbf{v}_h) &= \int_{\Omega} \mu w v_h \, dx - \sum_K \int_K \mathbf{a} w \cdot \nabla v_h \, dx - \sum_K \int_{\partial K_+} a_n w (\bar{v}_h - v_h) \, ds \\ &\quad + \sum_K \int_{\partial K_-} a_n \bar{w} (\bar{v}_h - v_h) \, ds + \int_{\Gamma_+} a_n \bar{w} \bar{v}_h \, ds \\ &\leq c \left(\sum_K \|w\|_{0,K} \left(\|v_h\|_{0,K} + \|\mathbf{a} \cdot \nabla v_h\|_{0,K} \right) \right. \\ &\quad + \sum_K \|w\|_{0,\partial K_+} \|a_n (\bar{v}_h - v_h)\|_{0,\partial K_+} \\ &\quad + \sum_K \|\bar{w}\|_{0,\partial K_-} \|a_n (\bar{v}_h - v_h)\|_{0,\partial K_-} \\ &\quad \left. + \left\| a_n^{\frac{1}{2}} \bar{w} \right\|_{0,\Gamma_+} \left\| a_n^{\frac{1}{2}} \bar{v}_h \right\|_{0,\Gamma_+} \right). \end{aligned} \quad (4.32)$$

Now, bounding each term,

$$\sum_K \|w\|_{0,K} \|v_h\|_{0,K} \leq \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A, \quad (4.33)$$

$$\sum_K h_K^{-\frac{1}{2}} \|w\|_{0,K} h_K^{\frac{1}{2}} \|\mathbf{a} \cdot \nabla v_h\|_{0,K} \leq \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A, \quad (4.34)$$

$$\begin{aligned} \sum_K \|w\|_{0,\partial K_+} \|a_n (\bar{v}_h - v_h)\|_{0,\partial K_+} &\leq c \sum_K h_K^{-\frac{1}{2}} \|w\|_{0,K} \|a_n (\bar{v}_h - v_h)\|_{0,\partial K_+} \\ &\leq c \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A, \end{aligned} \quad (4.35)$$

$$\sum_K \|\bar{w}\|_{0,\partial K_-} \|a_n(\bar{v}_h - v_h)\|_{0,\partial K_-} \leq c \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A, \quad (4.36)$$

$$\left\| a_n^{\frac{1}{2}} \bar{w} \right\|_{0,\Gamma_+} \left\| a_n^{\frac{1}{2}} \bar{v}_h \right\|_{0,\Gamma_+} \leq \|\mathbf{w}\|_{A'} \|\mathbf{v}_h\|_A. \quad (4.37)$$

Summation of these bounds leads to the result. \square

If $u \in H^1(\Omega)$ solves equation (2.1) for the case $\kappa = 0$, it is chosen to define $\mathbf{u} = (u, u)$. The action of the trace operator in the second slot is implicit in this definition (see Section 3). With this definition of \mathbf{u} , consistency can be addressed.

LEMMA 4.6 (consistency). *If u is a solution to (2.1), $\mathbf{u} = (u, u)$ and \mathbf{u}_h solves (2.8) for $\kappa = 0$, then for all $\mathbf{v}_h \in W_h^*$*

$$B_A(\mathbf{u} - \mathbf{u}_h, \mathbf{v}_h) = 0. \quad (4.38)$$

Proof. The proof involves the straightforward application of integration by parts to the bilinear form (see Labeur and Wells [2]). \square

The necessary results are now in place in to prove convergence of the method.

LEMMA 4.7 (convergence). *If $\mathbf{u} = (u, u)$, where u solves equation (2.1) for the case $\kappa = 0$ and \mathbf{u}_h is the solution to the finite element problem (2.8), then there exists a constant $c > 0$ such that*

$$\|\mathbf{u} - \mathbf{u}_h\|_A \leq \inf_{\mathbf{v}_h \in W_h^*} c \|\mathbf{u} - \mathbf{v}_h\|_{A'}. \quad (4.39)$$

Proof. From inf-sup stability (Lemma 4.4), consistency (Lemma 4.6) and continuity of the bilinear form (Lemma 4.5):

$$\begin{aligned} \|\mathbf{u}_h - \mathbf{w}_h\|_A &\leq c \sup_{\mathbf{v}_h \in W_h^*} \frac{|B_A(\mathbf{u}_h - \mathbf{w}_h, \mathbf{v}_h)|}{\|\mathbf{v}_h\|_A} = c \sup_{\mathbf{v}_h \in W_h^*} \frac{|B_A(\mathbf{u} - \mathbf{w}_h, \mathbf{v}_h)|}{\|\mathbf{v}_h\|_A} \\ &\leq c \sup_{\mathbf{v}_h \in W_h^*} \frac{\|\mathbf{u} - \mathbf{w}_h\|_{A'} \|\mathbf{v}_h\|_A}{\|\mathbf{v}_h\|_A} = c \|\mathbf{u} - \mathbf{w}_h\|_{A'}. \end{aligned} \quad (4.40)$$

Application of the triangle inequality

$$\|\mathbf{u} - \mathbf{u}_h\|_A \leq \|\mathbf{u} - \mathbf{w}_h\|_A + \|\mathbf{w}_h - \mathbf{u}_h\|_A \quad (4.41)$$

and $\|\mathbf{v}\|_A \leq \|\mathbf{v}\|_{A'}$ yields the result. \square

LEMMA 4.8 (convergence rate). *If $u \in H^{k+1}(\Omega)$, then*

$$\|\mathbf{u} - \mathbf{u}_h\|_A \leq ch^{k+\frac{1}{2}} \|u\|_{k+1,\Omega} \quad (4.42)$$

and

$$\|u - u_h\|_{0,\Omega} \leq ch^{k+\frac{1}{2}} \|u\|_{k+1,\Omega}. \quad (4.43)$$

Proof. The continuous interpolant of \mathbf{u} is denoted by $\mathcal{I}_h \mathbf{u} = (\mathcal{I}_h u, \bar{\mathcal{I}}_h u)$, where $\mathcal{I}_h u \in W^h \cap C(\bar{\Omega})$ and $\bar{\mathcal{I}}_h u = \mathcal{I}_h u|_{\Gamma_0}$, which is contained in \bar{W}_h . The standard interpolation estimate reads:

$$\|u - \mathcal{I}_h u\|_{m,K} \leq ch_K^{k+1-m} |u|_{k+1,K}. \quad (4.44)$$

Bounding each term in $\|\mathbf{u} - \mathcal{I}_h \mathbf{u}\|_{A'}$,

$$\|u - \mathcal{I}_h u\|_{0,K}^2 \leq ch_K^{2(k+1)} |u|_{k+1,K}^2, \quad (4.45)$$

$$h_K \|\mathbf{a} \cdot \nabla (u - \mathcal{I}_h u)\|_{0,K}^2 \leq ch_K^{2k+1} |u|_{k+1,K}^2, \quad (4.46)$$

$$\|(u - \bar{\mathcal{I}}_h u) - (u - \mathcal{I}_h u)\|_{0,\partial K}^2 = 0, \quad (4.47)$$

$$h_K \|u - \bar{\mathcal{I}}_h u\|_{0,\partial K}^2 \leq c \|u - \mathcal{I}_h u\|_{0,K}^2 \leq ch_K^{2(k+1)} |u|_{k+1,K}^2, \quad (4.48)$$

$$\|u - \bar{\mathcal{I}}_h u\|_{0,\partial K}^2 \leq ch_K^{-1} \|u - \mathcal{I}_h u\|_{0,K}^2 \leq ch_K^{2k+1} |u|_{k+1,K}^2, \quad (4.49)$$

$$h_K^{-1} \|u - \mathcal{I}_h u\|_{0,K}^2 \leq ch_K^{2k+1} |u|_{k+1,K}^2. \quad (4.50)$$

Using these results and equation (4.39) leads to the convergence estimates. \square

5. Analysis in the diffusive limit. The diffusive limit ($\mathbf{a} = \mathbf{0}$, $\mu = 0$) is now considered, in which case the bilinear form is given by equation (2.14). The analysis of the diffusive case is considerably simpler than for the hyperbolic case since stability can be demonstrated via coercivity of the bilinear form. Analysis tools and results which are typically used in the analysis of discontinuous Galerkin methods for elliptic problems [8] are leveraged against this problem.

To ease the notational burden, the case of homogeneous Dirichlet boundary conditions on Γ is considered. The extended function spaces

$$W(h) = W_h + H^2(\Omega) \cap H_0^1(\Omega), \quad (5.1)$$

$$\bar{W}(h) = \bar{W}_h + H_0^{1/2}(\Gamma^0), \quad (5.2)$$

where $H_0^{1/2}(\Gamma^0)$ is used to denote the trace space of $H_0^1(\Omega)$ on facets Γ^0 ,

$$H_0^{1/2}(\Gamma^0) = \{\bar{u} \in H^{1/2}(\Gamma^0), \bar{u} = 0 \text{ on } \Gamma\}. \quad (5.3)$$

As for the hyperbolic case, two norms on $W^*(h) = W(h) \times \bar{W}(h)$ are introduced for the examination of stability and continuity. The ‘stability’ norm reads

$$\|\mathbf{v}\|_D^2 = \sum_K \kappa \|\nabla v\|_{0,K}^2 + \sum_K \frac{\alpha \kappa}{h_K} \|\bar{v} - v\|_{0,\partial K}^2, \quad (5.4)$$

and the ‘continuity’ norm reads

$$\|\mathbf{v}\|_{D'}^2 = \|\mathbf{v}\|_D^2 + \sum_K \frac{\kappa h_K}{\alpha} \|\nabla v\|_{0,\partial K}^2. \quad (5.5)$$

To demonstrate that these expressions do constitute norms, recalling that F denotes a facet,

$$\begin{aligned} \sum_F \|v_+ - v_-\|_{0,F} &= \sum_F \|(v_+ - \bar{v}) - (v_- - \bar{v})\|_{0,F} \\ &\leq \sum_F \|\bar{v} - v_+\|_{0,F} + \|\bar{v} - v_-\|_{0,F} \\ &= \sum_K \|\bar{v} - v\|_{0,\partial K}. \end{aligned} \quad (5.6)$$

Denoting the average size of two cells sharing a facet by h_F ,

$$\|v\|_{0,\Omega}^2 \leq c_1 \left(\sum_K \kappa \|\nabla v\|_{0,K}^2 + \sum_F \frac{\alpha\kappa}{h_F} \|v^+ - v^-\|_{0,F}^2 \right) \leq c_2 \|\mathbf{v}\|_D^2, \quad (5.7)$$

where the first inequality is a standard result (See Arnold [13], Lemma 2.1 and Ern and Guermond [15], Lemma 3.5). Hence, $\|\cdot\|_D$ and $\|\cdot\|_{D'}$ constitute norms.

5.1. Stability. Before proceeding to coercivity of the bilinear form, an intermediate result is presented.

PROPOSITION 5.1. *There exists a constant $\alpha_K > 0$ such that for all $\mathbf{v} \in W^*(h)$*

$$\left| 2 \int_{\partial K} \kappa \nabla v \cdot \mathbf{n} (\bar{v} - v) ds \right| \leq \kappa \|v\|_{0,K}^2 + \frac{\alpha\kappa}{h_K} \|\bar{v} - v\|_{0,\partial K}^2. \quad (5.8)$$

Proof. Applying to the term $\int_{\partial K} \nabla v \cdot \mathbf{n} (\bar{v} - v) ds$ the Cauchy-Schwarz inequality, the inverse estimate (3.3) and Young's inequality,

$$\begin{aligned} \left| 2 \int_{\partial K} \nabla v \cdot (\bar{v} - v) \mathbf{n} ds \right| &\leq 2h_K^{1/2} \|\nabla v\|_{0,\partial K} h_K^{-1/2} \|\bar{v} - v\|_{0,\partial K} \\ &\leq 2c \|\nabla v\|_{0,K} h_K^{-1/2} \|\bar{v} - v\|_{0,\partial K} \\ &\leq \epsilon c \|\nabla v\|_{0,K}^2 + \frac{1}{\epsilon} h_K^{-1} \|\bar{v} - v\|_{0,\partial K}^2, \end{aligned} \quad (5.9)$$

where $\epsilon > 0$, but is otherwise arbitrary. Setting $\epsilon = 1/c$,

$$\left| 2 \int_{\partial K} \nabla v \cdot (\bar{v} - v) \mathbf{n} ds \right| \leq \|\nabla v\|_{0,K}^2 + ch_K^{-1} \|\bar{v} - v\|_{0,\partial K}^2. \quad (5.10)$$

The proposition holds if $\alpha \geq c$. \square

LEMMA 5.2 (coercivity). *If α is chosen such that equation (5.8) holds for all cells when $\alpha_K = \alpha$, then there exists a constant $c > 0$ such that for all $\mathbf{v} \in W^*(h)$*

$$B_D(\mathbf{v}, \mathbf{v}) \geq c \|\mathbf{v}\|_D^2. \quad (5.11)$$

Proof. Setting $\mathbf{w} = \mathbf{v}$ in the bilinear form for the diffusive limit case (2.14),

$$\begin{aligned} B_D(\mathbf{v}, \mathbf{v}) &= \sum_K \kappa \|\nabla v\|_{0,K}^2 + 2 \sum_K \int_{\partial K} \kappa \nabla v \cdot \mathbf{n} (\bar{v} - v) ds \\ &\quad + \sum_K \frac{\alpha\kappa}{h_K} \|\bar{v} - v\|_{0,\partial K}^2. \end{aligned} \quad (5.12)$$

The pertinent issue is that the second term on the right-hand side is not guaranteed to be positive for all \mathbf{v} . However, according to Proposition 5.1 this term is bounded from below by the penalty-related term under the assumption on α , which leads to the coercivity result. \square

5.2. Error analysis. The error analysis proceeds in a straightforward manner now that the stability result is in place.

LEMMA 5.3 (continuity). *There exists a constant $c > 0$ such that for all $\mathbf{w} \in W^*(h)$ and for all $\mathbf{v} \in W^*(h)$*

$$|B_D(\mathbf{w}, \mathbf{v})| \leq c \|\mathbf{w}\|_{D'} \|\mathbf{v}\|_{D'}. \quad (5.13)$$

Proof. From the definition of the bilinear form,

$$\begin{aligned} |B_D(\mathbf{w}, \mathbf{v})| &\leq \sum_K \kappa \|\nabla w\|_{0,K} \|\nabla v\|_{0,K} + \sum_K \kappa \|\nabla w\|_{0,\partial K} \|\bar{v} - v\|_{0,\partial K} \\ &+ \sum_K \kappa \|\bar{w} - w\|_{0,\partial K} \|\nabla v\|_{0,\partial K} + \sum_K \frac{\alpha\kappa}{h_K} \|\bar{w} - w\|_{0,\partial K} \|\bar{v} - v\|_{0,\partial K}. \end{aligned} \quad (5.14)$$

Each term can be bounded appropriately,

$$\sum_K \kappa \|\nabla w\|_{0,K} \|\nabla v\|_{0,K} \leq \|\mathbf{w}\|_{D'} \sum_K \kappa^{\frac{1}{2}} \|\nabla v\|_{0,K}, \quad (5.15)$$

$$\sum_K \kappa \|\nabla w\|_{0,\partial K} \|\bar{v} - v\|_{0,\partial K} \leq \|\mathbf{w}\|_{D'} \sum_K \left(\frac{\alpha\kappa}{h_K}\right)^{\frac{1}{2}} \|\bar{v} - v\|_{0,\partial K}, \quad (5.16)$$

$$\sum_K \kappa \|\bar{w} - w\|_{0,\partial K} \|\nabla v\|_{0,\partial K} \leq \|\mathbf{w}\|_{D'} \sum_K \left(\frac{\kappa h_K}{\alpha}\right)^{\frac{1}{2}} \|\nabla v\|_{0,\partial K}, \quad (5.17)$$

$$\sum_K \frac{\alpha\kappa}{h_K} \|\bar{w} - w\|_{0,\partial K} \|\bar{v} - v\|_{0,\partial K} \leq \|\mathbf{w}\|_{D'} \sum_K \left(\frac{\alpha\kappa}{h_K}\right)^{\frac{1}{2}} \|\bar{v} - v\|_{0,\partial K}. \quad (5.18)$$

Summing these inequalities shows that the bilinear form is continuous with respect to $\|\cdot\|_{D'}$. \square

If $u \in H^2(\Omega)$ satisfies equation (2.1) for the case $\mu = 0$ and $\mathbf{a} = \mathbf{0}$ and adopting the notation $\mathbf{u} = (u, u)$, as it was for the hyperbolic case in Section 4.2, consistency can be addressed.

LEMMA 5.4 (consistency). *For the case $\mu = 0$ and $\mathbf{a} = \mathbf{0}$, if u is a solution to (2.1) and setting $\mathbf{u} = (u, u)$, and if \mathbf{u}_h solves (2.8), then for all $\mathbf{v}_h \in W_h^*$*

$$B_D(\mathbf{u} - \mathbf{u}_h, \mathbf{v}_h) = 0. \quad (5.19)$$

Proof. This is demonstrated easily through the application of integration by parts to the bilinear form [2]. \square

LEMMA 5.5 (convergence). *If α is chosen suitably large such that the bilinear form is coercive, then there exists a constant $c > 0$ such that*

$$\|\mathbf{u} - \mathbf{u}_h\|_D \leq \inf_{\mathbf{w}_h \in W_h^*} c \|\mathbf{u} - \mathbf{w}_h\|_{D'}. \quad (5.20)$$

Proof. Using coercivity, consistency and continuity:

$$\begin{aligned} \|\mathbf{u}_h - \mathbf{w}_h\|_D^2 &\leq c |B_D(\mathbf{u}_h - \mathbf{w}_h, \mathbf{u}_h - \mathbf{w}_h)| \\ &= c |B_D(\mathbf{u} - \mathbf{w}_h, \mathbf{u}_h - \mathbf{w}_h)| \\ &\leq c \|\mathbf{u} - \mathbf{w}_h\|_{D'} \|\mathbf{u}_h - \mathbf{w}_h\|_{D'}, \end{aligned} \quad (5.21)$$

and then applying the triangle inequality and exploiting $\|\mathbf{v}\|_D \leq \|\mathbf{v}\|_{D'}$, yields the desired result. \square

LEMMA 5.6 (convergence). *If $u \in H^{k+1}(\Omega)$ and α is chosen such that the bilinear form is coercive, then there exist constants $c > 0$ such that*

$$\|\mathbf{u} - \mathbf{u}_h\|_D \leq ch^k \|u\|_{k+1,\Omega} \quad (5.22)$$

and

$$\|u - u_h\|_{0,\Omega} \leq ch^{k+1} \|u\|_{k+1,\Omega}. \quad (5.23)$$

Proof. The first estimate follows directly from the standard interpolation estimate for the continuous interpolant $\mathcal{I}_h \mathbf{u} = (\mathcal{I}_h u, \bar{\mathcal{I}}_h u)$, where again $\mathcal{I}_h u \in W^h \cap C(\bar{\Omega})$ and $\bar{\mathcal{I}}_h u = \mathcal{I}_h u|_{\Gamma_0}$, which is an element of \bar{W}_h . Applying the standard interpolation estimate (4.44) to $\|\mathbf{u} - \mathcal{I}_h \mathbf{u}\|_D$,

$$\|\nabla(u - \mathcal{I}_h u)\|_{0,K}^2 \leq ch^{2k} |u|_{k+1,K}^2, \quad (5.24)$$

$$h_K^{-1} \|(u - \bar{\mathcal{I}}_h u) - (u - \mathcal{I}_h u)\|_{0,\partial K} = 0, \quad (5.25)$$

Using these inequalities leads to equation (5.22). The L^2 estimate follows from the usual duality arguments. Owing to adjoint consistency of the method (since the bilinear form is symmetric), if \mathbf{w} is the solution to the dual problem

$$B_D(\mathbf{v}, \mathbf{w}) = \int_{\Omega} (u - u_h) \cdot v \, dx \quad \forall \mathbf{v} \in W^*(h), \quad (5.26)$$

then from consistency and continuity of the bilinear form, and the estimate in (5.22), it follows that

$$\begin{aligned} \|u - u_h\|_{0,\Omega}^2 &= B_D(\mathbf{u} - \mathbf{u}_h, \mathbf{w}) \\ &= B_D(\mathbf{u} - \mathbf{u}_h, \mathbf{w} - \mathbf{w}_h) \\ &\leq \|\mathbf{u} - \mathbf{u}_h\|_{D'} \|\mathbf{w} - \mathbf{w}_h\|_{D'} \\ &\leq ch \|w\|_{2,\Omega} \|\mathbf{u} - \mathbf{u}_h\|_{D'}. \end{aligned} \quad (5.27)$$

Finally, using the elliptic regularity estimate $\|w\|_{2,\Omega} \leq c \|u - u_h\|_{0,\Omega}$ leads to

$$\|u - u_h\|_{0,\Omega} \leq ch \|\mathbf{u} - \mathbf{u}_h\|_{D'}. \quad (5.28)$$

The L^2 error estimate follows trivially. \square

6. Observed stability and convergence properties. Some numerical examples are now presented to examine stability and convergence properties of the method. In all cases, the interface functions are chosen to be continuous everywhere ($l = 1$ in equation (2.7)), so the number of global degrees of freedom is the same as for a continuous Galerkin method on the same mesh. When computing the error for cases with polynomial basis order k , the source term and the exact solution are interpolated on the same mesh but using Lagrange elements of order $k + 6$. Likewise, if the field \mathbf{a} does not come from a finite element space it is interpolated using order $k + 6$ Lagrange elements. Exact integration is performed for all terms. All meshes are uniform and the measure of the cell size h_K is set to two times the circumradius of cell K .

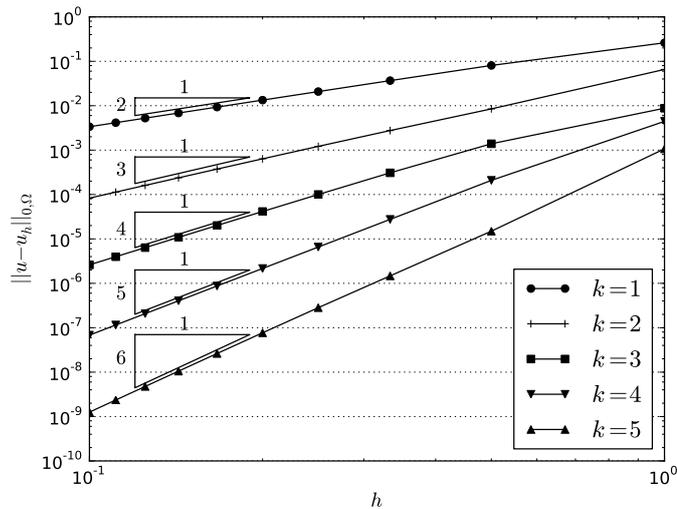


FIG. 6.1. Convergence for the hyperbolic case with h -refinement for various polynomial orders.

The computer code used for all examples in this section is freely available in the supporting material [16] under a GNU Public License. The necessary low-level computer code specific to this problem has been generated automatically from a high-level scripted input language using freely available tools from the FEniCS Project [17, 18, 19, 20]. The computer input resembles closely the mathematical notation and abstractions used in this work to describe the method. Particular advantage is taken of automation developments for methods that involve facet integration [18].

6.1. Hyperbolic problem. Consider the domain $\Omega = (-1, 1)^2$, with $\mu = 1$, $\mathbf{a} = (0.8, 0.6)$, $\kappa = 0$ and $u = 1$ on Γ_- . The source term f is chosen such that

$$u = 1 + \sin\left(\pi(1+x)(1+y)^2/8\right) \quad (6.1)$$

is the analytical solution to equation (2.1). This example has been considered previously for discontinuous Galerkin methods by Bey and Oden [21] and Houston et al. [22]. The convergence of the method is studied in the L^2 norm for h -refinement for various polynomial orders. The penalty term α plays no role in the hyperbolic limit since $\kappa = 0$.

The computed convergence behaviour for this problem is shown in Figure 6.1. For all polynomial orders, the method converges robustly. Interestingly, the results appear to converge at the rate $k + 1$ for this problem, an order $1/2$ faster than the rate predicted by the analysis. This is consistent with observations for the $k = 1$ case in Labeur and Wells [2].

6.2. Elliptic problem. A problem on the domain $\Omega = (-1, 1)^2$ is now considered, with $\mu = 0$, $\mathbf{a} = (0, 0)$ and $\kappa = 1$. The source term f is selected such that

$$u = \sin(\pi x) \sin(\pi y) \quad (6.2)$$

is the analytical solution to equation (2.1). The value of the penalty parameter is stated for each considered case.

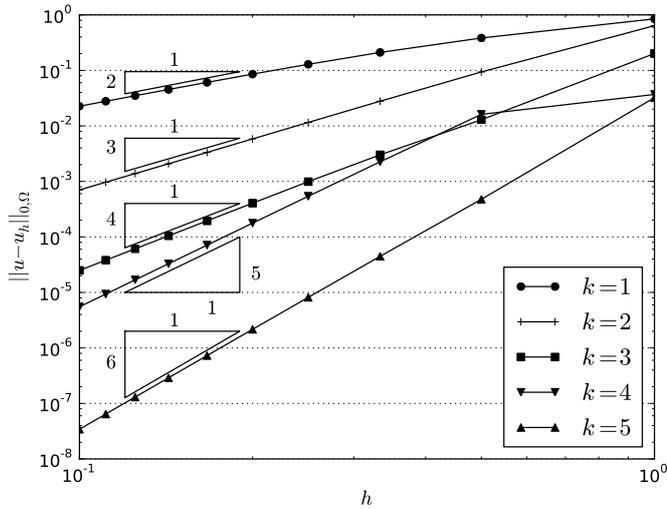


FIG. 6.2. Convergence for the elliptic case with h -refinement for various polynomial orders and $\alpha = 5$.

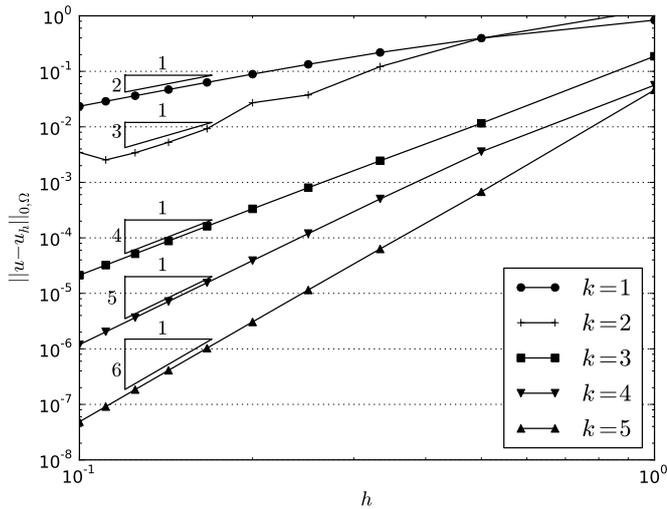


FIG. 6.3. Convergence for the elliptic case with h -refinement for various polynomial orders and $\alpha = 6$.

The computed errors in the L^2 norm for h -refinement with elements of varying polynomial order and $\alpha = 5$ are shown in Figure 6.2. In all cases, the predicted $k + 1$ order of convergence is observed. The computed results for $\alpha = 6$ are shown in Figure 6.3, in which the convergence for the $k = 2$ case is somewhat erratic. Using $\alpha = 4k^2$, since the penalty parameter for the interior penalty method usually needs to be increased with increasing polynomial order, reliable convergence behaviour at the predicted rate is recovered, as can be seen in Figure 6.4.

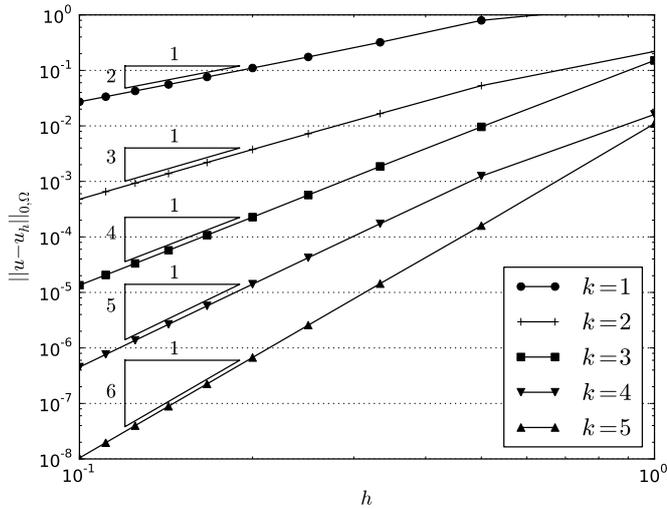


FIG. 6.4. Convergence for the elliptic case with h -refinement for various polynomial orders and $\alpha = 4k^2$.

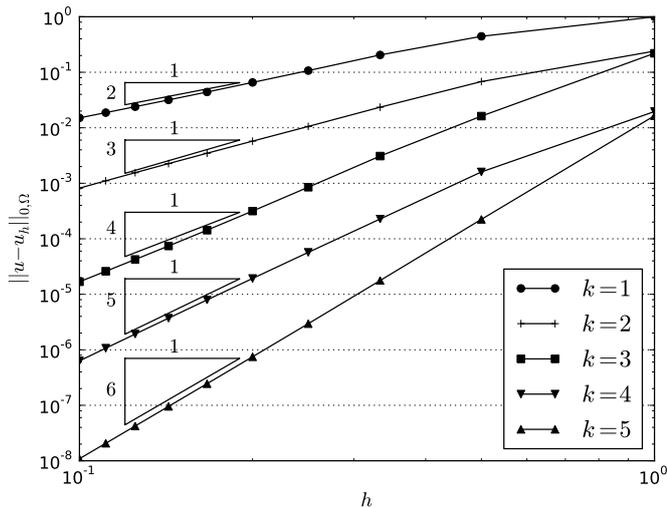


FIG. 6.5. Convergence for the advection-diffusion problem with $\kappa = 1 \times 10^{-3}$ with h -refinement for various combinations of k and $\alpha = 4k^2$.

6.3. Advection-diffusion problems. An advection-diffusion problem is considered on the domain $\Omega = (-1, 1)^2$, with $\mu = 0$, $\mathbf{a} = (e^x(y \cos y + \sin y), e^x y \sin y)$ and for various values of κ . The source term f is chosen such that equation (6.2) is the analytical solution. For all cases, $\alpha = 4k^2$.

The convergence response for the $\kappa = 1 \times 10^{-3}$ case is presented in Figure 6.5. For this advection dominated problem, the method is again observed to converge at the rate $k + 1$ for most cases, with the rate appearing to be slightly less than $k + 1$

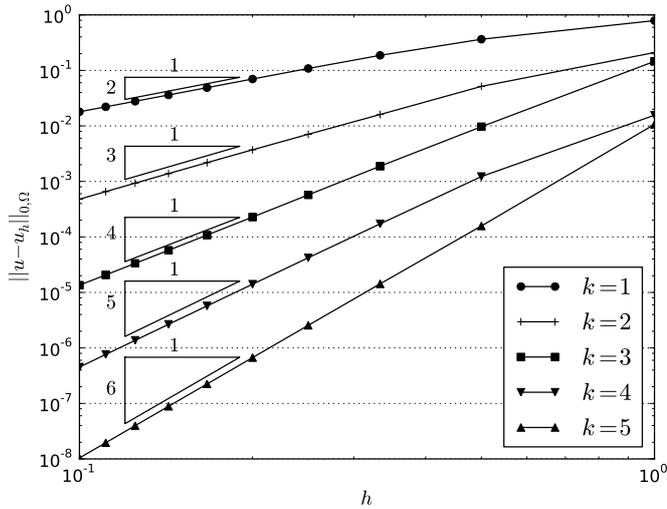


FIG. 6.6. Convergence for the advection-diffusion problem with $\kappa = 0.1$ with h -refinement for various combinations of k and $\alpha = 4k^2$.

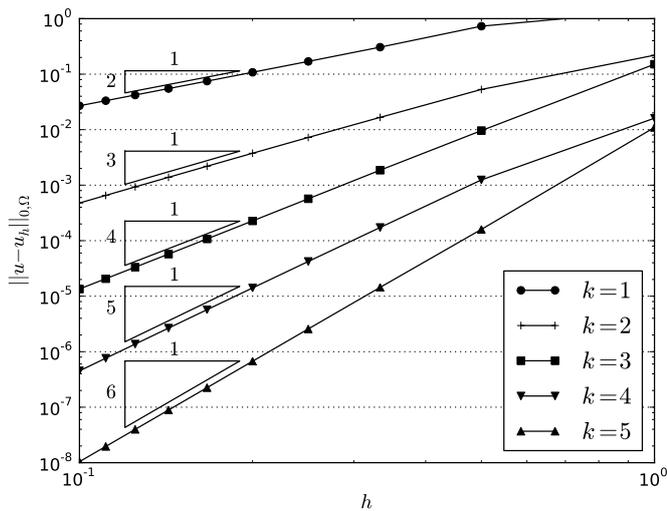


FIG. 6.7. Convergence for the advection-diffusion problem with $\kappa = 10$ with h -refinement for various combinations of k and $\alpha = 4k^2$.

for the cases $k = 2$ and $k = 3$. For $\kappa = 0.1$, the convergence response is presented in Figure 6.6. A convergence rate of $k + 1$ is observed for all polynomial orders. For $\kappa = 10$, which is diffusion dominated, the convergence response is presented in Figure 6.7. Consistent with other results, a convergence rate of $k + 1$ is observed in all cases.

7. Conclusions. Stability and error estimates have been developed for an interface stabilised finite element method which inherits features of both continuous and discontinuous Galerkin methods. The analysis is for the advection-diffusion-reaction equation, and is valid in both the hyperbolic and elliptic limits. While the number of global degrees of freedom on a given mesh for the method is the same as for a continuous finite element method, the stabilisation mechanism is the same as that present in upwinded discontinuous Galerkin methods. This is borne out in the stability analysis, which demands consideration of an inf-sup condition. Analysis of the method shows that it inherits the stability properties of discontinuous Galerkin methods, and that it converges at a rate of $k + 1/2$ in the advective limit and $k + 1$ in the diffusive limit, as is typical for discontinuous Galerkin and appropriately constructed stabilised finite element methods. The analysis presented in this work provides a firm theoretical basis for the method to support the performance observed in simulations in other works. The analysis results are supported by numerical examples which considered a range of polynomial order elements. In particular, for the examples considered the method was observed to converge slightly faster than the predicted rate for hyperbolic problems.

Acknowledgement. The author acknowledges the helpful comments on this manuscript from Robert Jan Labeur and the assistance of Kristian B. Ølgaard in implementing the features which facilitated the automated generation of the computer code used in Section 6.

References.

- [1] T. J. R. Hughes, G. Scovazzi, P. B. Bochev, and A. Buffa. A multiscale discontinuous Galerkin method with the computational structure of a continuous Galerkin method. *Computer Methods in Applied Mechanics and Engineering*, 195(19-22): 2761 – 2787, 2006.
- [2] R. J. Labeur and G. N. Wells. A Galerkin interface stabilisation method for the advection-diffusion and incompressible Navier-Stokes equations. *Computer Methods in Applied Mechanics and Engineering*, 196(49-52):4985–5000, 2007.
- [3] B. Cockburn, B. Dong, J. Guzmán, M. Restelli, and R. Sacco. A hybridizable discontinuous Galerkin method for steady-state convection-diffusion-reaction problems. *SIAM Journal on Scientific Computing*, 31(5):3827–3846, 2009.
- [4] E. Burman and B. Stamm. Minimal stabilization for discontinuous Galerkin finite element methods for hyperbolic problems. *Journal of Scientific Computing*, 33(2):183–208, 2007.
- [5] R. J. Labeur and G. N. Wells. Interface stabilised finite element method for moving domains and free surface flows. *Computer Methods in Applied Mechanics and Engineering*, 198(5-8):615 – 630, 2009.
- [6] A. Buffa, T. J. R. Hughes, and G. Sangalli. Analysis of a multiscale discontinuous Galerkin method for convection-diffusion problems. *SIAM Journal on Numerical Analysis*, 44(4):1420–1440, 2006.
- [7] A. Ern and J.-L. Guermond. Discontinuous Galerkin methods for Friedrichs’ systems. I. General theory. *SIAM Journal on Numerical Analysis*, 44(2):753–778, 2006.
- [8] D. N. Arnold, F. Brezzi, B. Cockburn, and L. D. Marini. Unified analysis of discontinuous Galerkin methods for elliptic problems. *SIAM Journal on Numerical Analysis*, 39(5):1749–1779, 2002.
- [9] W. H. Reed and T. R. Hill. Triangular mesh methods for the neutron transport equation. Technical Report LA-UR-73-479, Los Alamos Scientific Laboratory, 1973.

- [10] P. Lesaint and P.-A. Raviart. On a finite element method for solving the neutron transport equation. In *Mathematical Aspects of Finite Elements in Partial Differential Equations*, Publication No. 33, pages 89–123. Math. Res. Center, Univ. of Wisconsin-Madison, Academic Press, New York, 1974.
- [11] C. Johnson and J. Pitkäranta. An analysis of the discontinuous Galerkin method for a scalar hyperbolic equation. *Mathematics of Computation*, 46(173):1–26, 1986.
- [12] M. F. Wheeler. An elliptic collocation-finite element method with interior penalties. *SIAM Journal on Numerical Analysis*, 15(1):152–161, 1978.
- [13] D. N. Arnold. An interior penalty finite element method with discontinuous elements. *SIAM Journal on Numerical Analysis*, 19(4):742–760, 1982.
- [14] S. C. Brenner and L. R. Scott. *The Mathematical Theory of Finite Element Methods*, volume 15 of *Texts in Applied Mathematics*. Springer New York, third edition, 2008.
- [15] A. Ern and J.-L. Guermond. *Theory and Practice of Finite Elements*, volume 159 of *Applied Mathematical Sciences*. Springer-Verlag, New York, 2004.
- [16] G. N. Wells. Supporting material, 2009. URL <http://www.dspace.cam.ac.uk/handle/1810/221687>.
- [17] R. C. Kirby and A. Logg. A compiler for variational forms. *ACM Transactions on Mathematical Software*, 32(3):417–444, 2006.
- [18] K. B. Ølgaard, A. Logg, and G. N. Wells. Automated code generation for discontinuous Galerkin methods. *SIAM Journal on Scientific Computing*, 31(2): 849–864, 2008.
- [19] K. B. Ølgaard and G. N. Wells. Optimisations for quadrature representations of finite element tensors through automated code generation. *ACM Transactions on Mathematical Software*, 37(2), 2010. URL <http://www.dspace.cam.ac.uk/handle/1810/218613>. To appear.
- [20] A. Logg and G. N. Wells. DOLFIN: Automated finite element computing. 2010. URL <http://www.dspace.cam.ac.uk/handle/1810/218613>. Submitted.
- [21] K. S. Bey and J. T. Oden. *hp*-Version discontinuous Galerkin methods for hyperbolic conservation laws. *Computer Methods in Applied Mechanics and Engineering*, 133(3–4):259 – 286, 1996.
- [22] P. Houston, C. Schwab, and E. Süli. Stabilized *hp*-finite element methods for first-order hyperbolic problems. *SIAM Journal on Numerical Analysis*, 37(5): 1618–1643, 2000.